

Amplitude Response

Kemo Filter Response 8.05 is a classic 4 pole Butterworth type filter. This response is fitted to BenchMaster 8 filters, with switchable high and low pass on each channel. The modified responses Pulse and Flat are shown. Data is theoretical.


Response 8.05 (Butterworth) Data			
Equivalent Slope		24 dB / Octave	
Stopband (theoretical)		> -82.0 dB	
Overshoot (theoretical)		10.9 % at 0.9 / F_c	
Risetime to 0.996		0.70 / F_c	
Mean phase line (theoretical)		-165 f / F_c	
Attenuation / dB	Normalised Frequency / F_c		Attenuation / dB
0.10	0.63	1.00	3.0
0.25	0.71	1.10	5.0
0.50	0.76	1.25	8.4
1.00	0.84	1.50	14.3
3.00	1.00	1.75	19.5
6.00	1.14	2	24.0
12.00	1.40	3	38.2
24.00	2.00	4	48.0
36.00	2.83	5	56.0
48.00	4.00	8	72.0
60.00	5.63	10	80.0
80.00	10.0	-	-

• Kemo Limited

3 Brook Court
Blakeney Road
Beckenham Kent BR3 1HG
www.kemo.com
Tel + 44 (0) 20 8658 3838
Fax + 44 (0) 20 8658 4084


• Kemo Inc.

13183 Wexford
Hollow Road North
Jacksonville
FL 32224
Tel (904) 223 0662
Fax (904) 223 6771

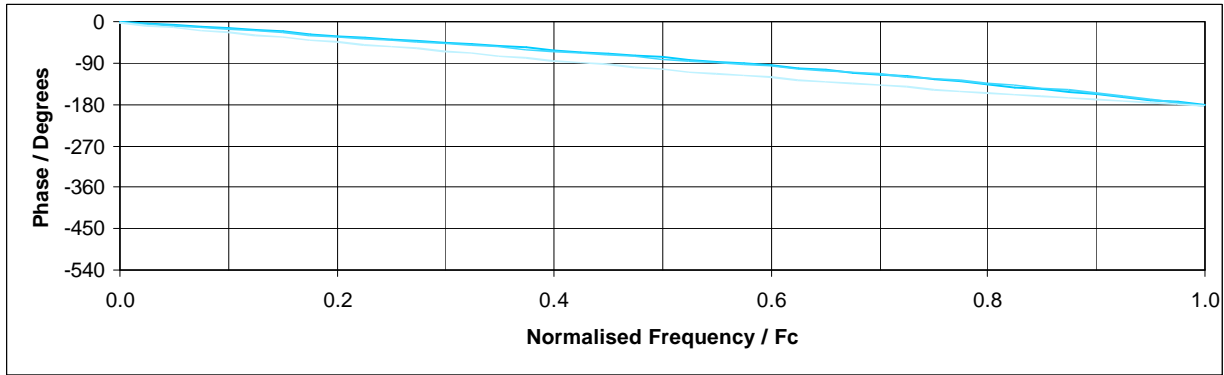


Passband Phase Response

The Curve above shows the passband phase responses of the Kemo 8.05 filters.

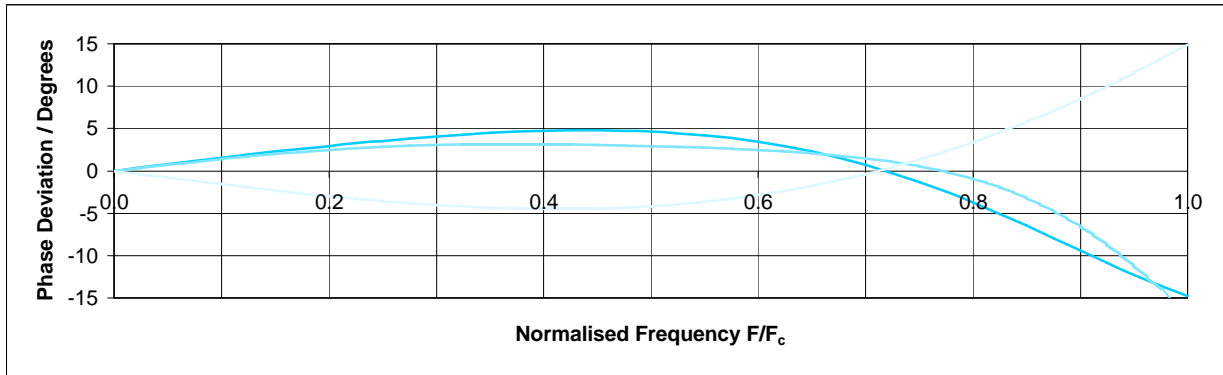

Passband phase deviation

The above curve shows the passband phase variation for the Kemo response 8.05 filters, this is the difference between the mean phase line and the passband phase response of the filter.

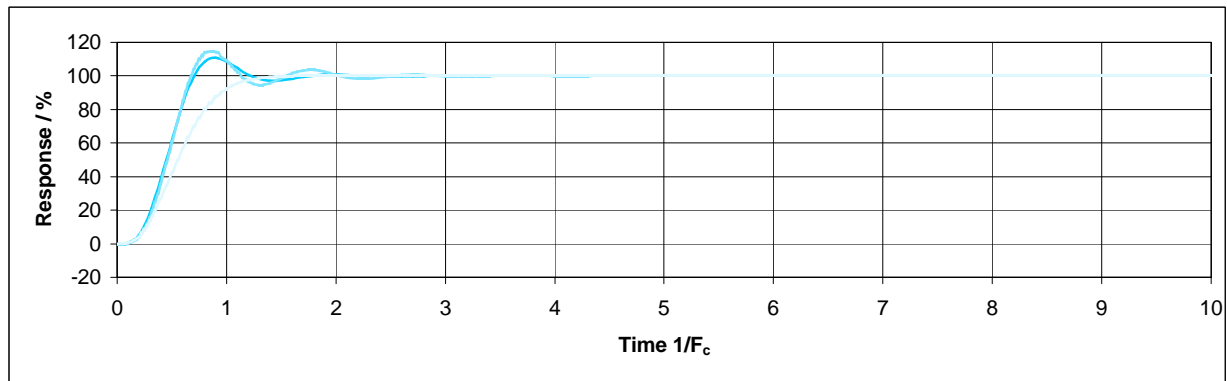

Time Response to Step Input

The curve above shows the time response to a step input to the response 8.05 filter.
Note The minimum overshoot of the pulse modified response.

Note – F_c is cut-off frequency

Due to continued product development Kemo Limited reserve the right to change specification without notice.

• Kemo Limited

3 Brook Court
Blakeney Road
Beckenham Kent BR3 1HG
www.kemo.com
Tel + 44 (0) 20 8658 3838
Fax + 44 (0) 20 8658 4084

• Kemo Inc.

13183 Wexford
Hollow Road North
Jacksonville
FL 32224
Tel (904) 223 0662
Fax (904) 223 6771