


- Lowpass, Highpass, Bandpass, Bandstop
- High performance ready to use
- Low distortion
- Stable DC characteristics
- High Dynamic Range
- 0.01 Hz to > 500 kHz
- Range of stock filter responses
- Compact 25 x 50 x 15 mm 4 pole
50 x 50 x 15 mm 8 pole
- Metal Case
- Programmable 255 linear steps
- '1600 W' Version 1792:1 frequency range

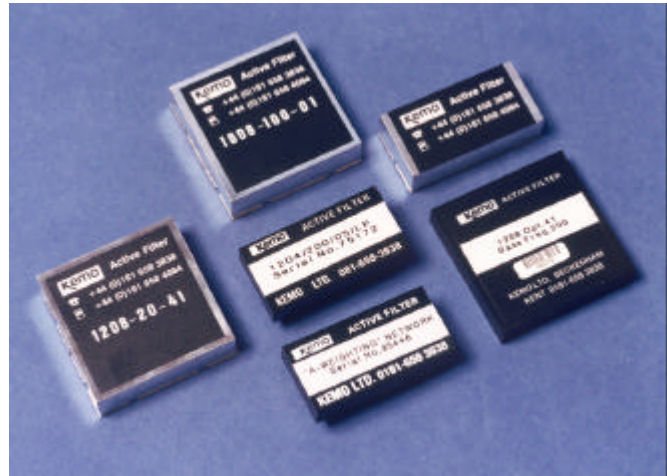

Applications

- Anti-aliasing filtering
- Sound and Vibration testing
- Noise elimination
- Band limiting
- Medical research and electronics
- Data acquisition systems
- Signal reconstruction
- Aerospace and Communication systems

1200 Series Resistor Set

Add your own resistors to set the filter cutoff (f_c) frequency within a 1000:1 range, or fit to any of the Kemo filter module carrier cards. A range of stock 4 and 8 pole filter responses including Bessel, Butterworth, low distortion linear phase, and responses optimised for anti-aliasing.

1600 Series Programmable

Programmable by TTL 8 bit word, to give 255 linear filter cutoff steps. A 20 Hz 1600 Series gives 255 cutoff steps from 20 Hz to 5 100 Hz. Available with the same filter responses as the 1200 Series. Kemo have a range of programmable cards and systems for the 1600 series modules.

1600 W

Programmable, 100 pseudo-logarithmic steps over a 1792:1 range. Ideal for applications where close filter cutoff steps are required at low frequency, while maintaining a wide frequency range. A 20 Hz '1600 W' gives 20 Hz steps at low frequency with a highest cutoff at 35 840 Hz.

Due to continued product development Kemo Limited reserves the right to change specification without notice

• Kemo Limited

3 Brook Court
Blakeney Road
Beckenham Kent BR3 1HG
www.kemo.com
Tel + 44 (0) 20 8658 3838
Fax + 44 (0) 20 8658 4084

• Kemo Inc.

13183 Wexford
Hollow Road North
Jacksonville
FL 32224
Tel (904) 223 0662
Fax (904) 223 6771
Modules.doc

Mechanical Specification (typical values)

1200/1600/1600W	4 pole	8 pole
Dimensions (case)	25 x 50 x 15 mm 1 x 2 x 0.6 "	50 x 50 x 15 mm 2 x 2 x 0.6 "
Weight 1200	20 gms 0.7 oz	35 gms 1.3 oz
1600/1600W	25 gms 0.9 oz	45 gms 1.6 oz
Pin size 1600/1600W Series	0.6 mm square 2.5 mm long on 0.1" grid .025 " square 0.1" long	
Sockets 1200 Series	Sockets suitable for 0.6 mm pins as above	
Temperature	0 – 45 °C, non condensing	

Electrical Specification (typical values ¹)

Input Impedance	1 M Ω
Output Impedance	47 Ω
Output current	8 mA (max)
Supply Voltage	+/- 7 Volt to +/- 16 Volt DC
Supply current	4 pole 25 mA 8 pole 50 mA
Gain	-1 dB (pin to trim increased gain)
DC Offset	< +/- 60 mV (trim pin on modules)
DC offset drift	100 μ V/ °C at 25 °C
Signal level (sine wave)	within 2.5 Volts of supply Voltage, for < 10 K Ω load
Phase matching	+/- 2° (closer matching on request)
Noise and THD	< 0.003% typical (dependant on frequency and amplitude)

Notes

¹ Filter performance is dependant on many variables during use, including input levels and frequencies, and quality of voltage supply. Here representative typical values are given.

Filter Responses

Standard responses are held in stock, these are:-

4 and 8 Pole Butterworth

4 and 8 Pole Bessel

Linear phase, low distortion, Response 41, ideal for general purpose filtering,
flat response to f_c , -80dB at 3 f_c .

Sharp cut off, Response 01, ideal for anti aliasing
flat response to f_c , -80 dB at 1.5 f_c .

For the 1200 Resistor set series our stock covers 0.1 to 250 kHz

For the 1600 Programmable series base frequencies are available in 1,2,5,10,20,50,100,200 Hz,
with 0.1 and 500 Hz available for some responses.

With over 30 years of building active filters Kemo have over 90 filter responses on our files. Please contact us for any special requirements you have.

Carrier Cards

Kemo have a range of carrier cards for filter modules, standalone units, to fit PC's and VME racks, and our own

5 and 18 slot 3U rack systems. Most carrier cards are user configurable with, input gain to +60dB, icp transducer supply, AC/DC coupling, single ended/differential input, and output attenuation. Most cards also allow for 3 cutoff frequencies with 1200 series modules, f_a , f_b , and f_{a+b} , and 255 cutoffs with 1600 series modules. All settings are manually user configurable on the cards.

	Channels	Modules	Mounting	Size	Power	Comments
CardMaster 1	1	1200/1600	Standalone	100 x 60 x 20	9-30 V	Compact simple filter card
CardMaster 21.2	2	1200/1600	Kemo rack		Rack	Fits to Kemo FrameMaster 21 Racks
CardMaster 8	8	1200/1600	PC	AT ISA Slot	5 V	PC Card
CardMaster 1600	8	1600/1600W	VME Rack	VME	5 V	RS 232 control versions with gain

• Kemo Limited

3 Brook Court
Blakeney Road
Beckenham Kent BR3 1HG
www.kemo.com
Tel + 44 (0) 20 8658 3838
Fax + 44 (0) 20 8658 4084

• Kemo Inc.

13183 Wexford
Hollow Road North
Jacksonville
FL 32224
Tel (904) 223 0662
Fax (904) 223 6771

Modules.doc